SERIES 500

Emergency



OVERVIEW

Series 500 Emergency pin spot has 2 optional lenses (open area & corridor) for different applications. It utilises a removable front cover design and adaptor ring to suit multiple hole diameters. The Series 500 pin spot is supplied with an external driver and external battery for convenient maintenance.


FEATURES

- 3W Emergency pin spot
- Ni-Cad battery

OPTIONS

- Corridor lens
- Open area lens

PRODUCT DIMENSIONS

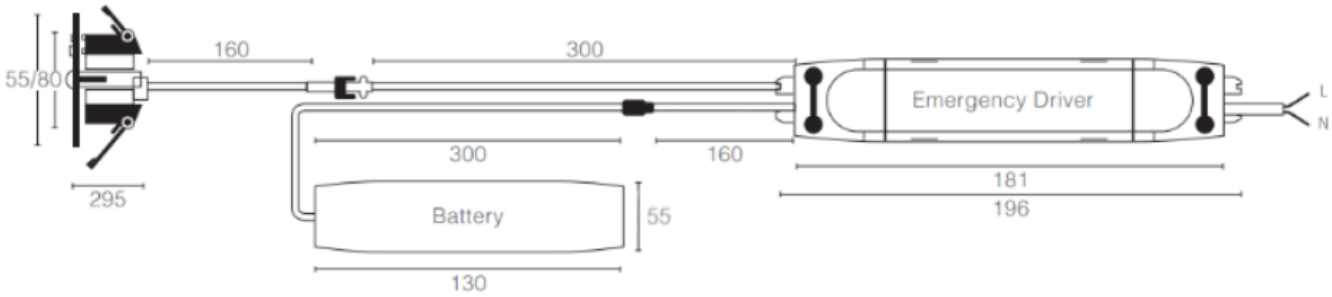


Telephone: 01522 287060 | Email: office@neotechnologies.co.uk
Neo Technologies Ltd, Unit 3, 1 Sadler Road, Lincoln, LN6 3RS
www.neotechnologies.co.uk

This document is uncontrolled if printed, all information is subject to change. Generated on 06/03/25


SERIES 500

Emergency

PHOTOMETRIC

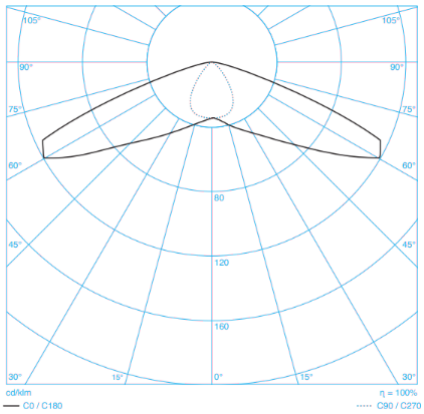

Corridor Function (CF)

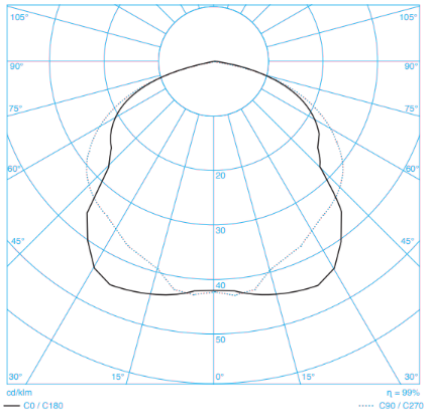

Open Area (OA)

PRODUCT SPECIFICATION

500 - (LM) - (FN)

lumen output (LM)	
Code	Description
150	150lm

Emergency Function (FN)	
Code	Description
NM	Non-Maintained

OPTIONS



With included bezel



Corridor Function (CF)



Open Area (OA)

Telephone: 01522 287060 | Email: office@neotechnologies.co.uk

Neo Technologies Ltd, Unit 3, 1 Sadler Road, Lincoln, LN6 3RS

www.neotechnologies.co.uk

This document is uncontrolled if printed, all information is subject to change. Generated on 06/03/25